


Installation of the MAINFURL #30 track

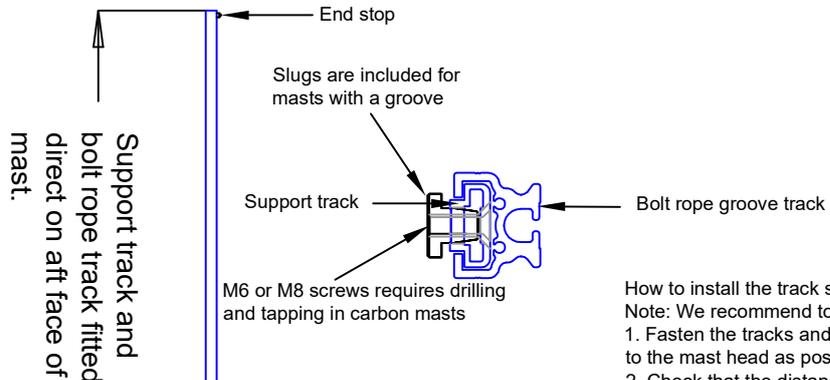




On masts with groove the support track and solid ramp is fastened with slugs

How to install the track system:

Note: We recommend to fix all screws with Loctite 222.

1. Fasten the tracks and solid ramp loosely by tape with the top end as far up to the mast head as possible.
2. Check that the distance from mid gooseneck to feeder is minimum 30cm.
3. Mark the solid ramp position on the mast.
4. Install the support tracks starting at the mast head, then the solid ramp and finally the flexible ramp groove (supplied if the mast have no bolt rope groove).
5. Slide the upper bolt rope track up from below and secure it with the upper end stop.
6. Fit the (2 pcs. 4 mm) alignment pins and slide the next track up. Secure it with the rivets supplied.
7. The lower track joining at the solid ramp is made with alignment pins and riveted into the supplied joining profile.
8. Pull up the flexible ramp in the grooves and fasten it to the solid ramp with a line.
9. Install the feeder.

Solid ramp

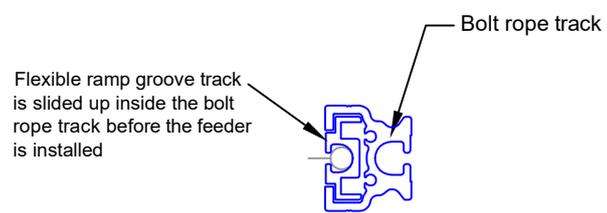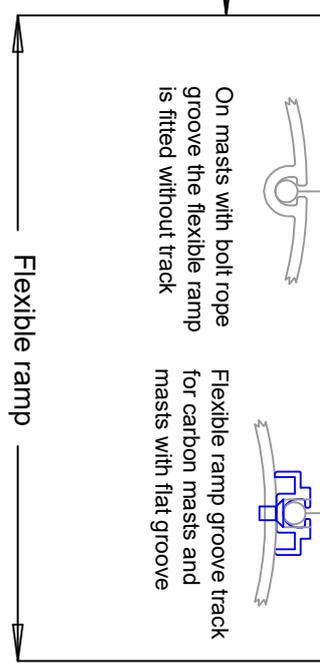

Min. 40 cm